



HSP Metric Test Point BSP Hydraulic Hose Coupling

600 bar working pressure


Fitted with Hydra-Test test points

Use with direct or remote (flexible) test probes

For BSPP hose sizes

Install Hydra-Test hose couplings between the female swivel nut of the flexible hose and the fixed male connection. The integral Test Point Plug may then be used with HSP Hydra-Test Test Probes, Test System or Test Kits to obtain random pressure and temperature checks during servicing or fault finding. The fluid sampling Probe is also compatible.

All probes may be connected and disconnected at full system pressure without fluid loss or ingress of dirt. Male cone is provided with an 'O' Ring seal.

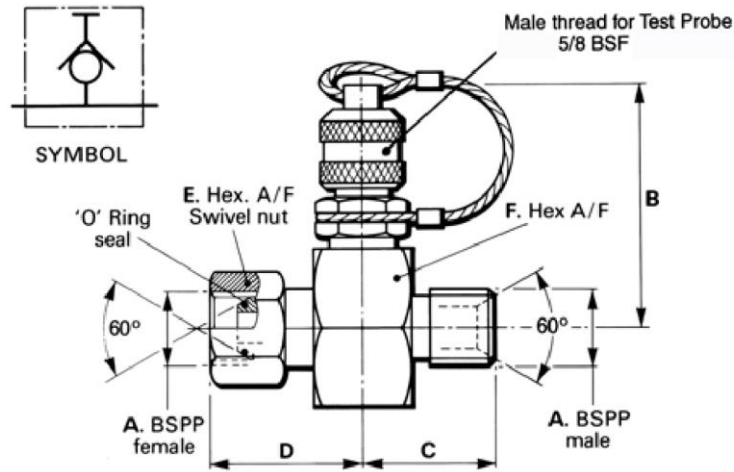

Pipe Size A	B	C	D	E	F	Weight	Code No.
BSPP	mm	mm	mm	mm	mm	kg	
1/4"	45.60	23.50	27.50	18.00	28.57	0.16	HSP1581-2M
3/8"	45.60	24.50	30.50	23.00	28.57	0.17	HSP1581-3M
1/2"	45.60	26.00	34.00	26.00	28.57	0.17	HSP1581-4M
5/8"	57.80	26.00	35.50	31.00	32.99	0.21	HSP1581-5M
3/4"	47.80	26.50	40.50	31.00	32.99	0.25	HSP1581-6M
1"	52.50	27.50	43.50	43.00	42.38	0.45	HSP1581-8M
1.1/4"	57.30	28.50	43.50	47.00	52.03	0.58	HSP1581-10M
1.1/2"	61.30	32.90	40.50	56.00	56.34	0.90	HSP1581-12M

Please specify code number from the table. Standard seals are Nitrile. For Viton seals add -V to the end of the code.



Hydraulic System Products Limited

3 Monckton Road, Monckton Road Industrial Estate, Wakefield, WF2 7AL
 T: 01924 364748 F: 01924 290450 E: sales@h-s-p.co.uk W: www.h-s-p.co.uk

