


INLINE HOUSINGS FOR HSP CARTRIDGE VALVES

This housing is designed to allow HSP Cartridge Valves to be used “In-Line” applications. A recess is machined to be compatible with the mounting requirements of HSP Standard Cartridge Valves. Threaded ports are provided for pressure/ return line connections and a separate pilot port is blanked off when housing is used with a Pilot Operated Check Valve (Cartridge). Two mounting holes allow rigid attachment of the assembly to bulkheads etc.

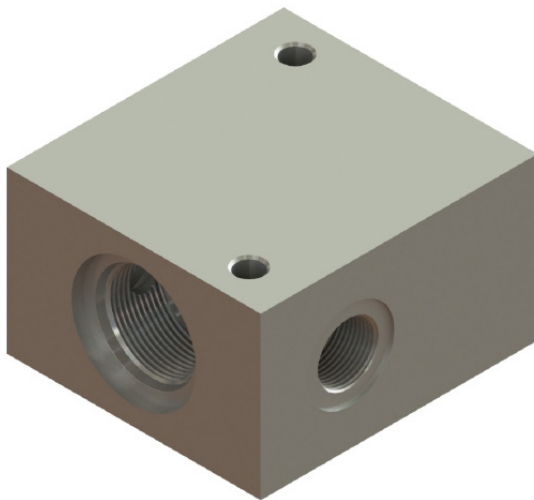

- Working pressure up to 350 bar
- For HSP 1 5/8" SAE cartridge valves
- 3/4" BSP ports, 1/4" pilot port

PART CODE:	HOUSING
HSP882	HOUSING ONLY
HSP883	HOUSING & HSP302-5000
HSP884	HOUSING & HSP688-5000

