
BLANK CAVITY PLUGS

Cavity plugs are now available from Hydraulic System Products for the purpose of enabling the removal of cartridge valves from a circuit whilst still maintaining the integrity of the hydraulic system. This could be for the purposes of system flushing following repairs, component replacements or to change an operational function within the circuit. Available as a blank or ported to fit either a gauge or a test point to take readings from lines 1 or 2.



- *Zinc plated steel body*
- *Stainless Steel options available*

CAVITY	A (MM)	B (MM)	C (MM)	D (MM)	E	F (MM)	WEIGHT (KG)	PART NUMBER
SAE-08-2	35.85	7.35	22.00	12.60	3/4"-16 UNF	22	0.059	HSP0272-08-2
SAE-10-2	41.65	7.85	27.00	15.80	7/8"-14 UNF	22	0.101	HSP0272-10-2
SAE-12-2	56.20	10.00	32.00	22.15	1-1/16"-12 UNF	32	0.213	HSP0272-12-2
SAE-16-2	56.20	10.00	38.10	28.50	1-5/16"-12 UNF	38	0.321	HSP0272-16-2
SAE-20-2	69.20	12.00	50.00	36.45	1-5/8"-12 UNF	50	0.628	HSP0272-20-2

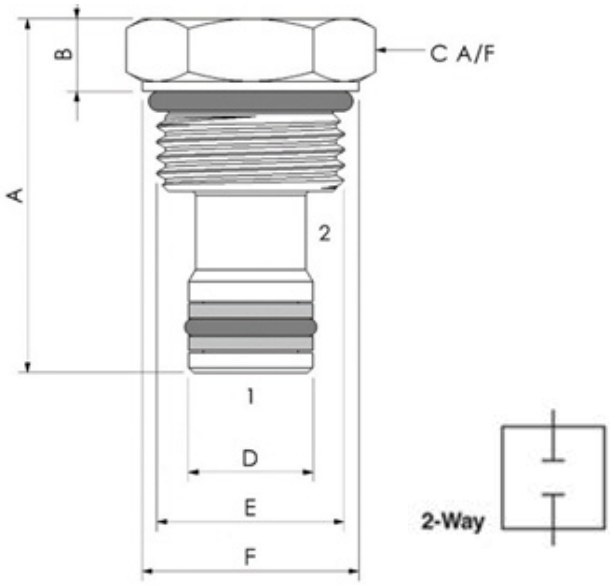

CAVITY	TORQUE IN NM FERROUS (NON-FERROUS)
08	70 -77 (45-50)
10	100-110 (65-71)
12	170-187 (95-108)
16	270-297 (158-169)
20	288-310 (197-210)